
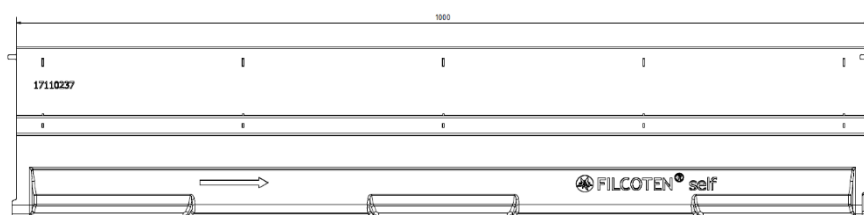


FILCOTEN PAVE - Domestic Slotted Channel



Issued by: New Product Development NPI - Andrew Allbright
 Issued to: Ben Green, Anil Bangher, Simon Bradbeer, Michael White, Steve Mascal, Jon Coe
 Issue Date: 29th April 2016 - Rev1
 Product Availability: 16th May 2016 (in stock)

Features & Benefits



- Discreet surface water drainage system
- Designed to suit blocks or pavers up to 80mm in depth
- Offset draining slot provides a discreet threshold drainage solution
- Slotted tops and access units manufacture from galvanised steel
- Light weight and easy to move drainage channel, primarily aimed at new house building and other domestic applications such as drives and gardens.
- Load Classes A15 to B125 when tested in accordance with EN1433
- CE Marked with DOP available from BG

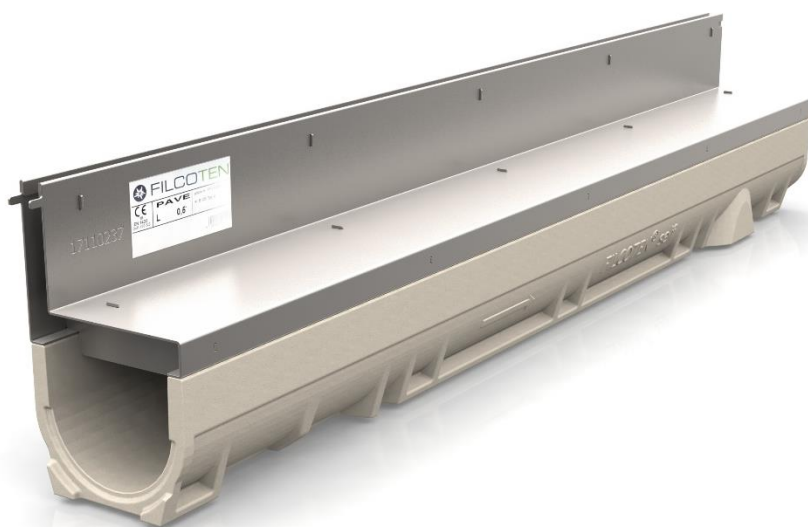

10710203 Filcoten Pave 1000mm LG Channel

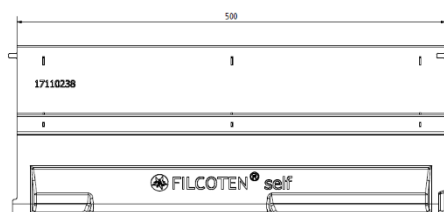


10710283 Filcoten Pave 500mm LG Channel



10710000
Self-Channel


FILCOTEN PAVE - System Components

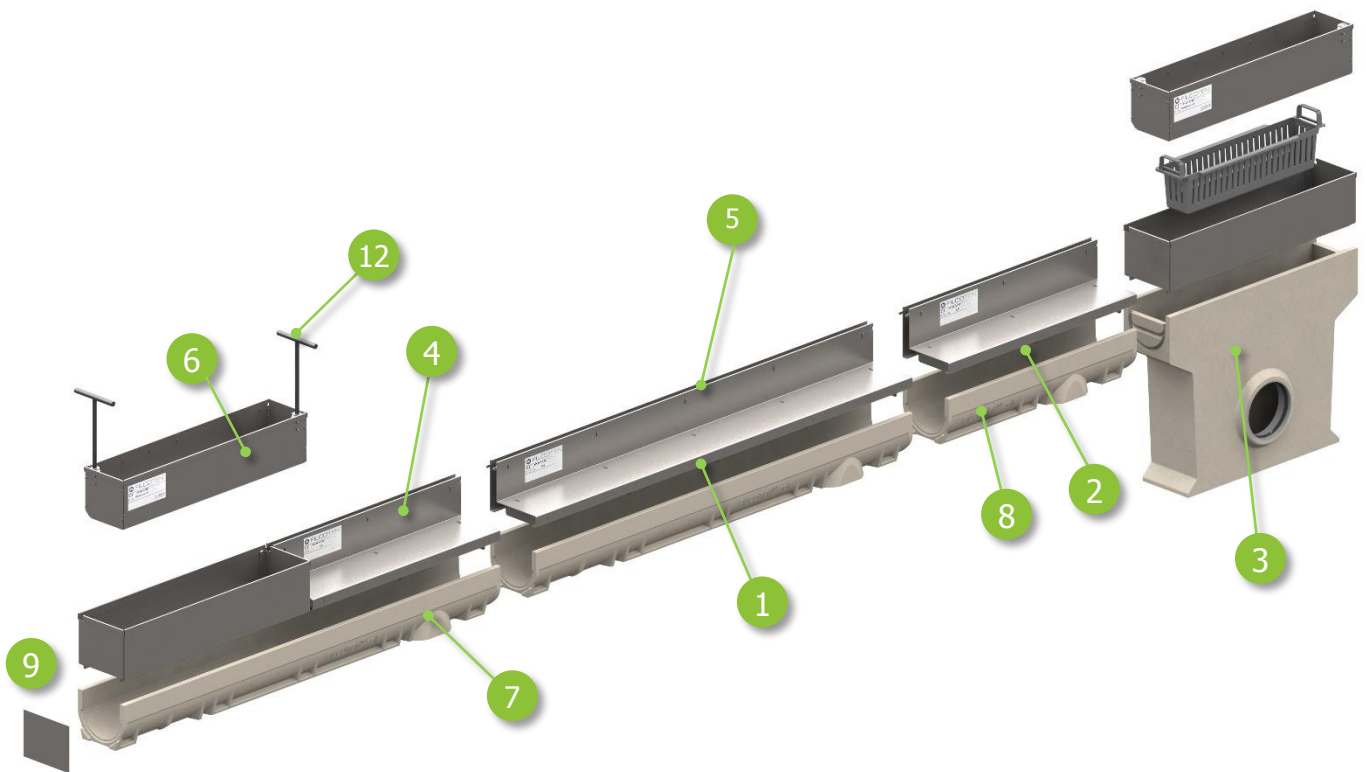

No.	Product Code	Description	Weight kg
1	10710203	FILCOTEN self NW 100, 1000 mm, incl. slot top galv. steel NW 100, asym., SW 12,5 cl.B125kN, SH80 Consisting of: 10710000-Filcoten Self Channel-1000mm, 17110237-Filcoten slot top-1000mm	12.1
2	10710283	FILCOTEN self NW 100, 500 mm, incl. slot top galvanized steel NW 100, asym., SW12,5 cl.B125kN, SH80 Consisting of: 10710080-Filcoten light channel-500mm, 17110238-Filcoten slot top-500mm	8.7
3	10710293	FILCOTEN self NW 100, sump unit, incl. maintenance unit galv. steel, asym., SW12,5 cl.B125kN, SH80 Consisting of: 10710090-Filcoten Sump Unit, 17110297-Maintenance Unit	21.1
4	17110238	Slot top galvanized steel NW 100, asymmetric, SW 12,5 cl. B 125 kN, 500/123/103/SH80	2.2
5	17110237	Slot top galvanized steel NW 100, asymmetric, SW 12,5 cl. B 125 kN, 1000/123/103/SH80	4.4
6	17110297	Maintenance unit galvanized steel NW 100, asymmetric, SW 12,5 cl. B 125 kN	4.1
7	10710000	FILCOTEN self NW 100, BH95, without slope (1000mm LG)	7.75
8	10710090	FILCOTEN light NW 100, BH95, L=500 mm, without slope	4.43
9	19010221	SELF Closing end cap NW 100, Galvanised Steel	0.1
10	19010222	SELF Outlet end cap, NW100, with outlet DN100, Galvanised steel	0.2
11	17110297	front cap V NW 100 and NW 150, variable height 80 - 200, galvanized,	0.0
12	TBC	M8 threaded Lifting Key	

FILCOTEN PAVE - Installation

Asphalt & Pavement:

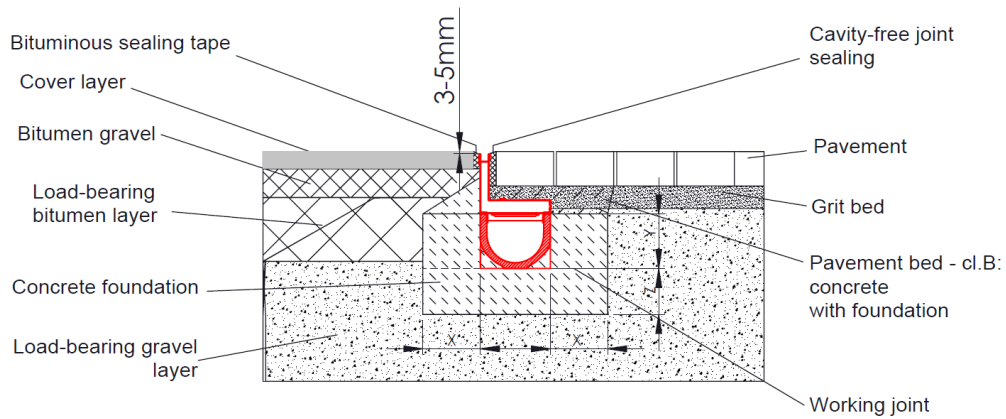

Load class	A 15 kN	B 125 kN
Concrete quality acc. to O-Norm B4710-1*	C 16/20	C 20/25
Width: X	≥ 8 cm	≥ 10 cm
Height: Y	0 cm	≥ 10 cm
Thickness: Z	≥ 8 cm	≥ 10 cm
Reinforcement bar	Unnecessary	
* Concrete quality is a minimum requirement and has to be adapted to the local conditions.		

Typical 50mm block paver installation







Tel: 020 8953 6177 Email: enquiries@arbourlandscapesolutions.co.uk

[@arbourlandsol](#)
[@arbourlandsol](#)
[@arbourlandsol](#)
[Read our reviews on google](#)

Arbour Landscape Solutions Ltd. 4 Woodside, Eaton Bray, Dunstable LU6 2RQ

VAT: 325032151 . EORI: 325032151000. Company Registration Number: 12054147

www.arbourlandscapesolutions.co.uk

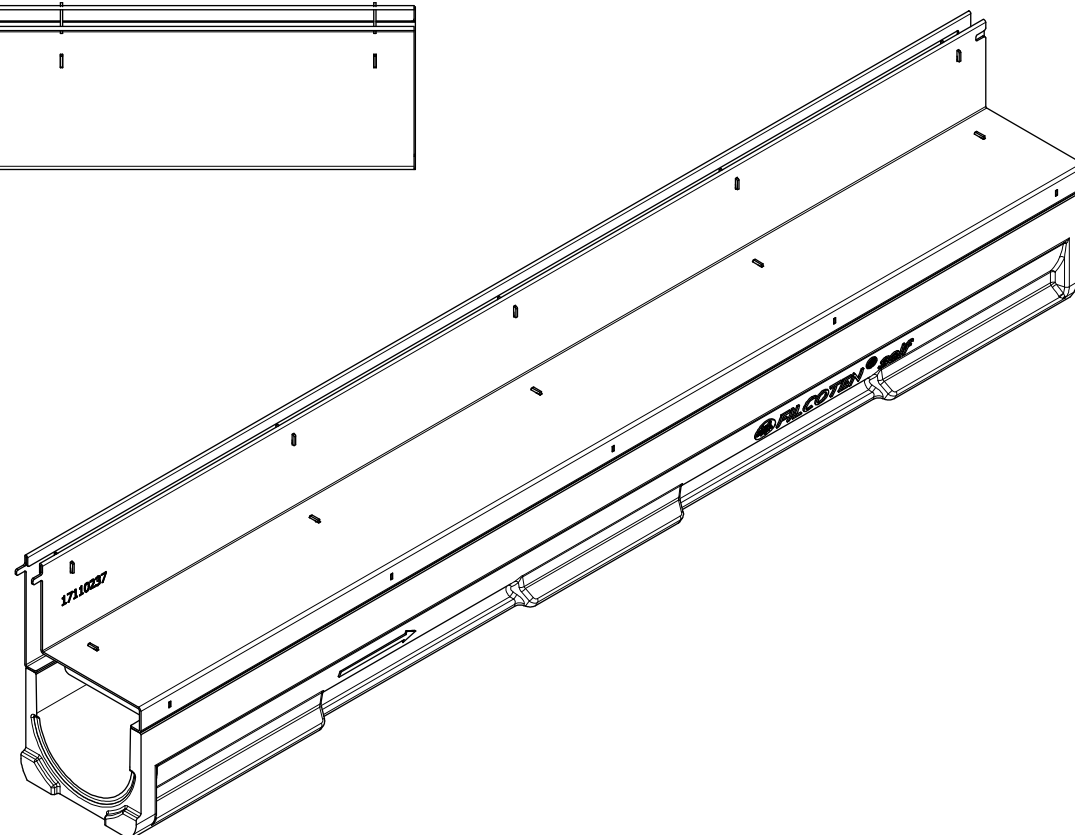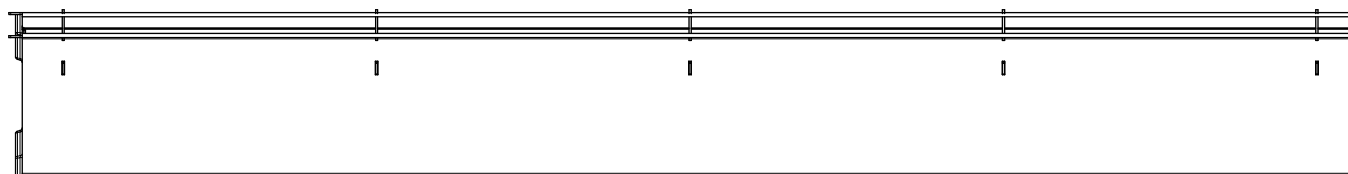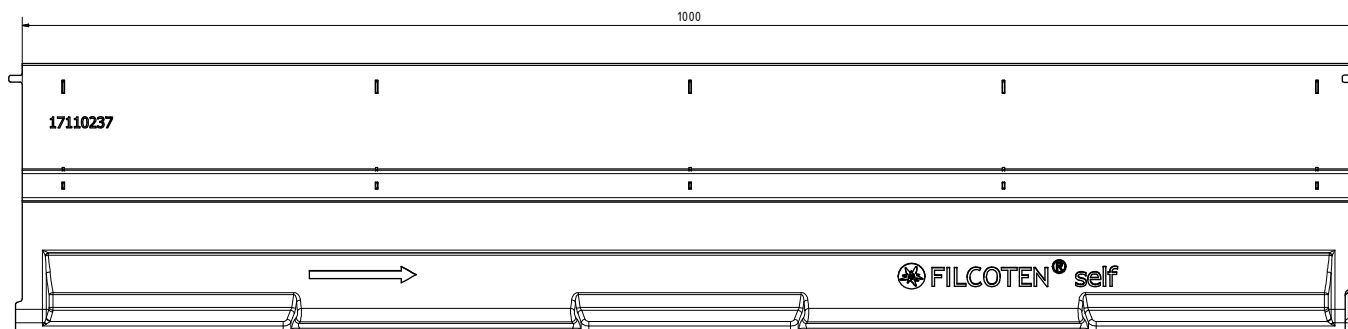



Tel: 020 8953 6177 Email: enquiries@arbourlandscapesolutions.co.uk

[@arbourlandsol](#) [@arbourlandsol](#) [@arbourlandsol](#) [@arbourlandsol](#) Read our reviews on google

Arbour Landscape Solutions Ltd. 4 Woodside, Eaton Bray, Dunstable LU6 2RQ





VAT: 325032151 . EORI: 325032151000. Company Registration Number: 12054147

www.arbourlandscapesolutions.co.uk

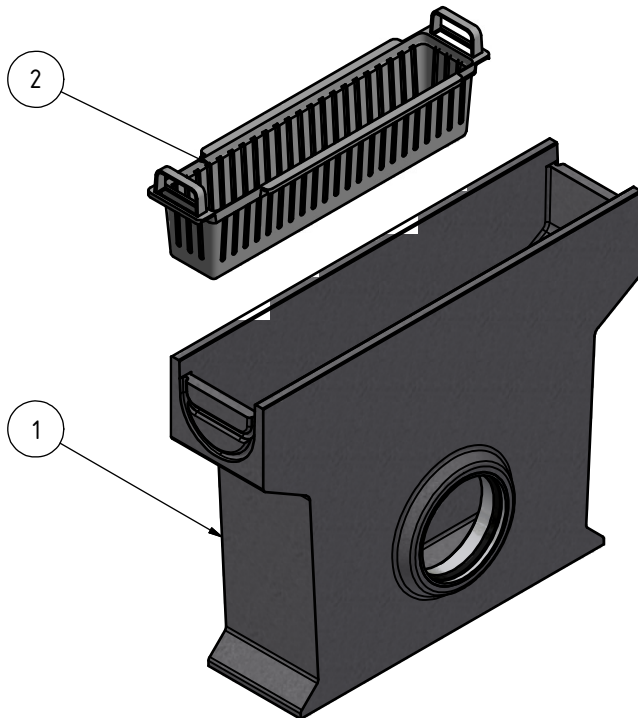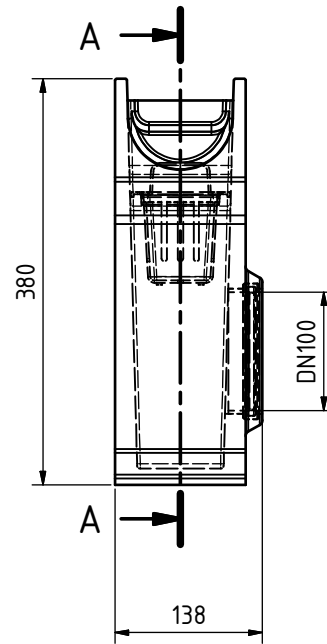

 @arbourlandsol
 @arbourlandsol
 @arbourlandsol
 Read our reviews on google

www.arbourlandscapesolutions.co.uk

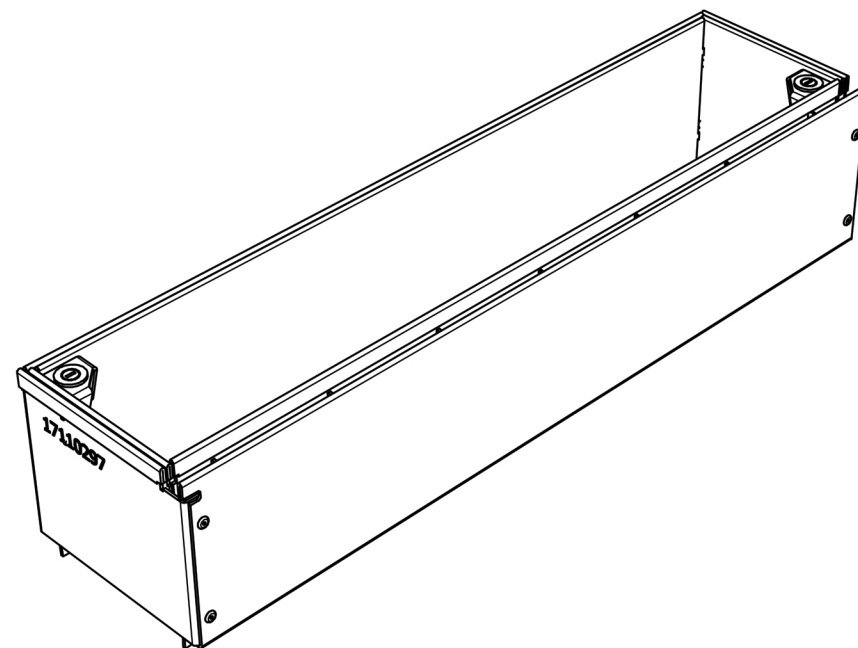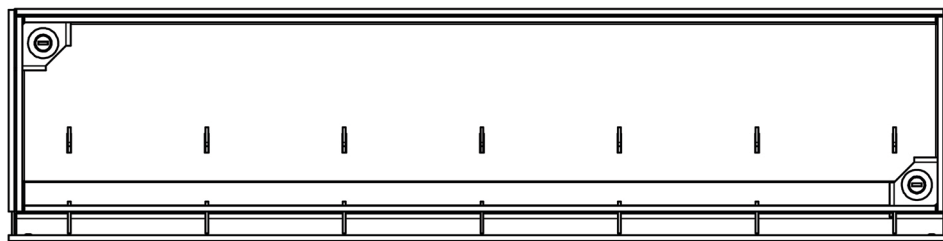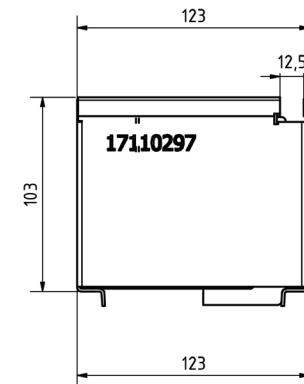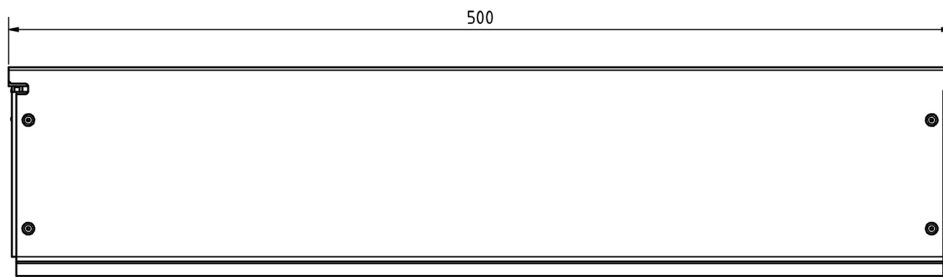

Tel: 020 8953 6177 Email: enquiries@arbourlandscapesolutions.co.uk

[@arbourlandsol](#)
[@arbourlandsol](#)
[@arbourlandsol](#)
[Read our reviews on google](#)

Arbour Landscape Solutions Ltd. 4 Woodside, Eaton Bray, Dunstable LU6 2RQ

VAT: 325032151 . EORI: 325032151000. Company Registration Number: 12054147

www.arbourlandscapesolutions.co.uk